

LED SHOE BOX LIGHT


UNIQUE SPECIAL DESIGN
HIGH BRIGHT LED CHIPS
VARIOUS ADJUSTABLE MOUNT
UL CUL DLC CERTIFIED
SMART LIGHTING

Features

- 100-400W Available
- Dust-proof and waterproof
- UL,cUL,DLC approved
- Dusk to Dawn photocell sensor
- Microwave motion sensor
- Die-cast aluminum housing anti-corrosion
- Silicone rubber seal, moisture, high temperature.
- 6K High voltage Surge test approved.
- SMD3030 140LMW LED chips
- 50,000hrs lifespan
- 100-277VAC,277--480VAC input voltage
- All in one(Round,square pole),slip fter,Trunnion choice.
- Beam angle : TYPE II TYPE III TYPE V
- 5 years warranty



Applications

LED Shoebox lighting series can be widely used in urban roads,Industrial areas,Residential areas, Sidewalks,Parking lot,Schools,Gardens and etc.



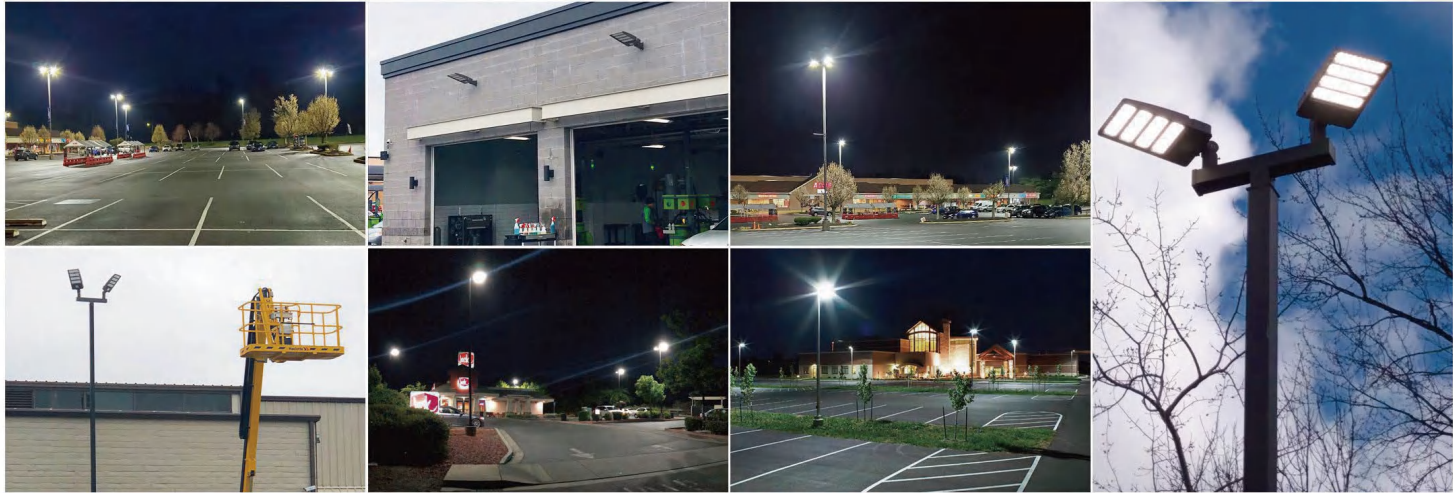


Series	Lumens	Base	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
NG-NSB -100W	14000LM	3 pin wires	TYPE II TYPE III TYPE V	Input Voltage 100-277VAC 50/60Hz 277-480VAC Total Power 100W 150W 200W 240W 320W Power Factor(%) >90	SMD3030 chips	WW 3000K NW 4000K DW 5000K CW 5700K	70 70 CRI 80 80 CRI 90 90 CRI
NG-NSB -150W	21000LM	3 pin wires					
NG-NSB -200W	28000LM	3 pin wires					
NG-NSB -240W	33600LM	3 pin wires					
NG-NSB -320W	44800LM	3 pin wires					
NG-NSB -400W	56000LM	3 pin wires					




DIMENSIONS

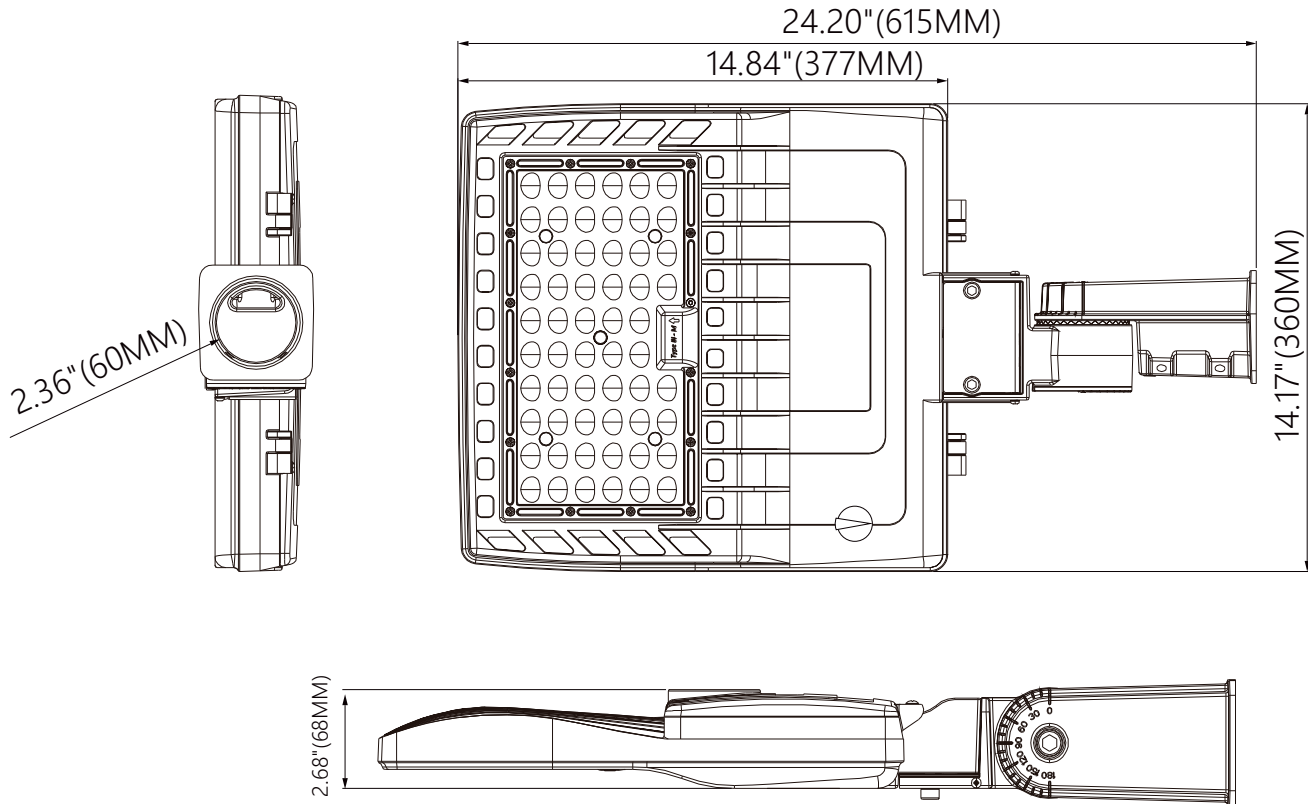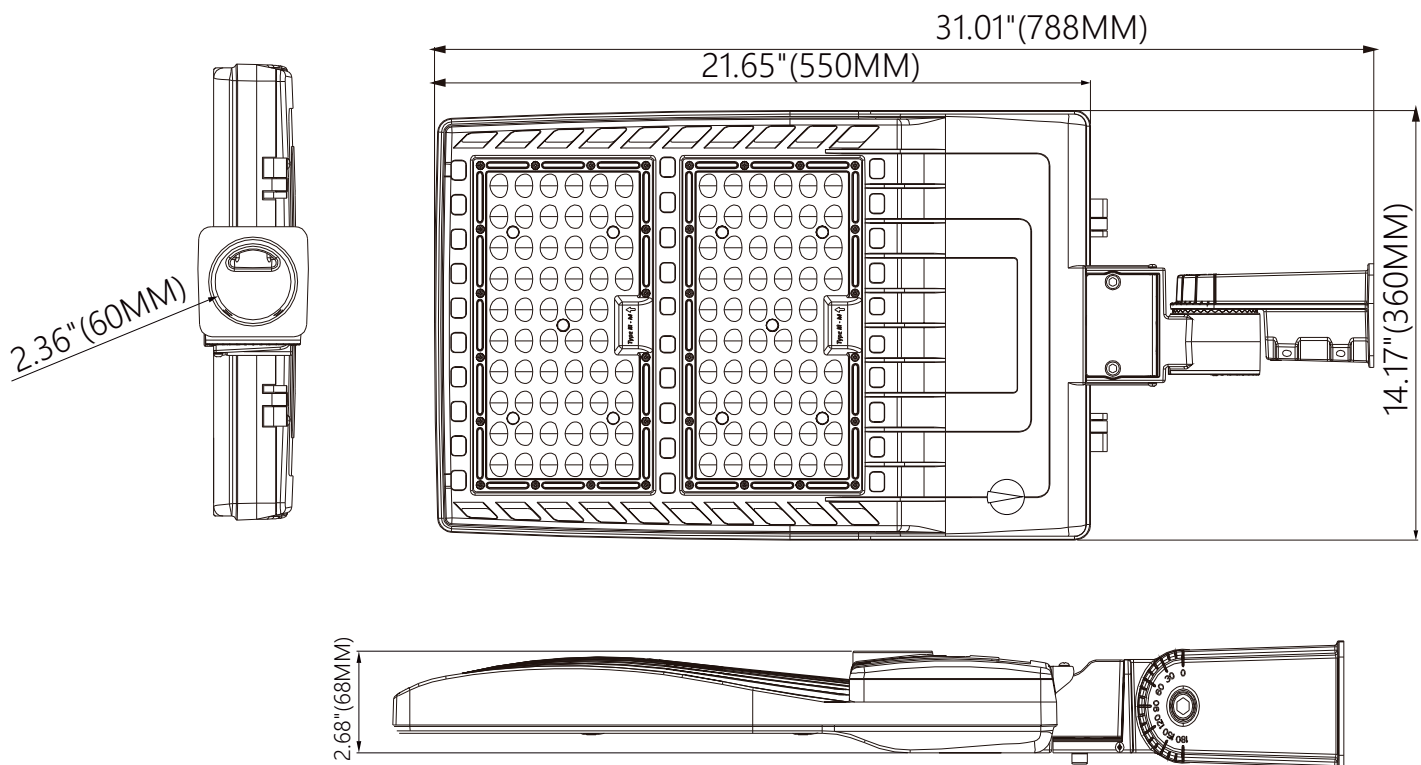100W 150W 200W 240W**320W 400W**




TYPE III (100W)

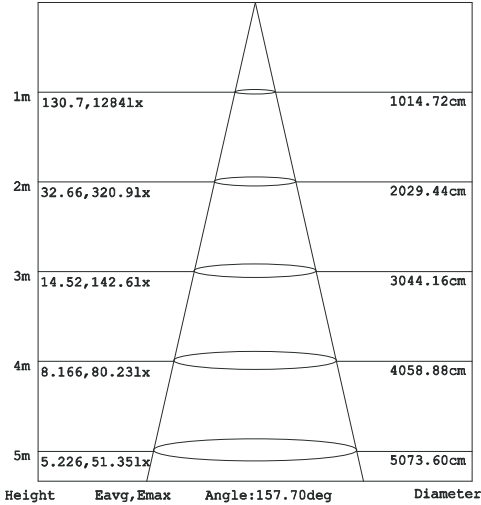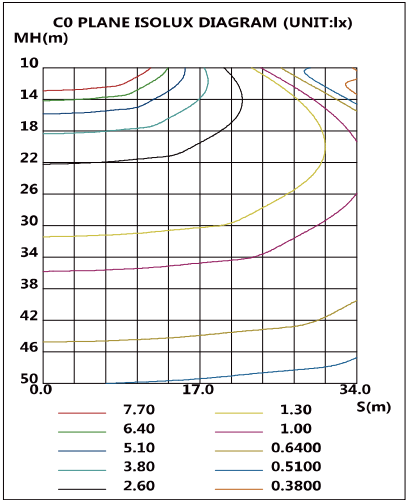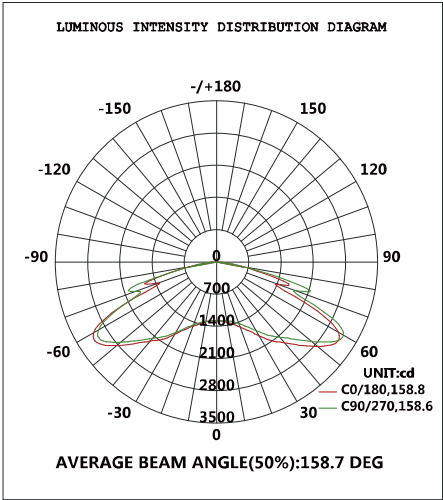




TYPE III (150W)

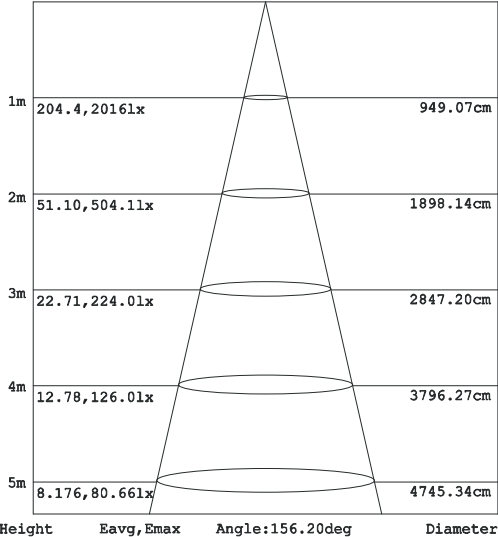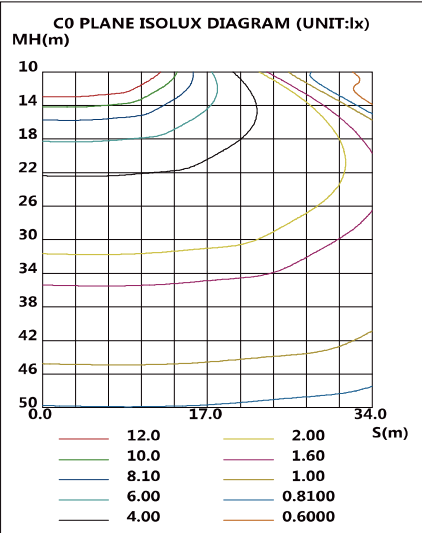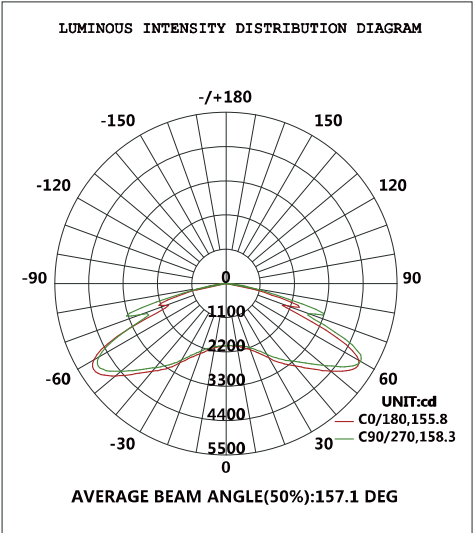




TYPE III (200W)

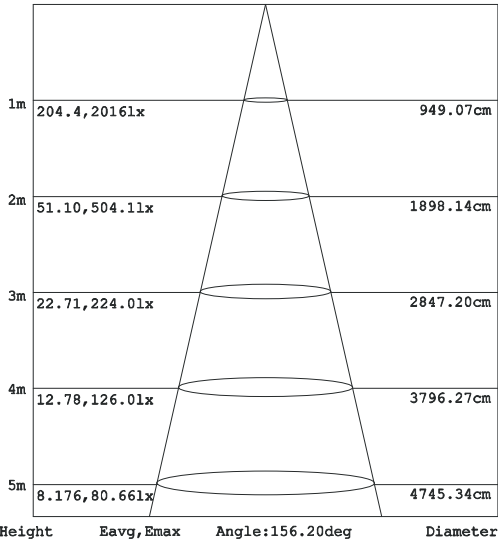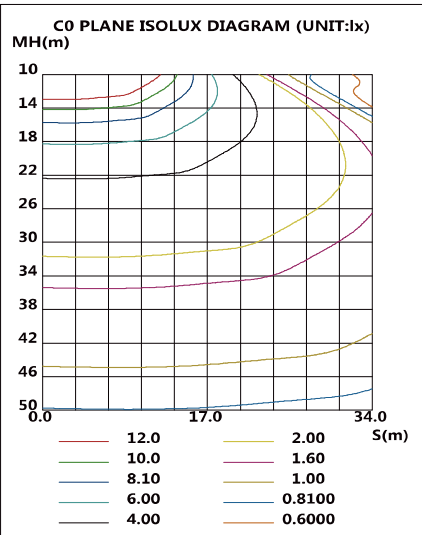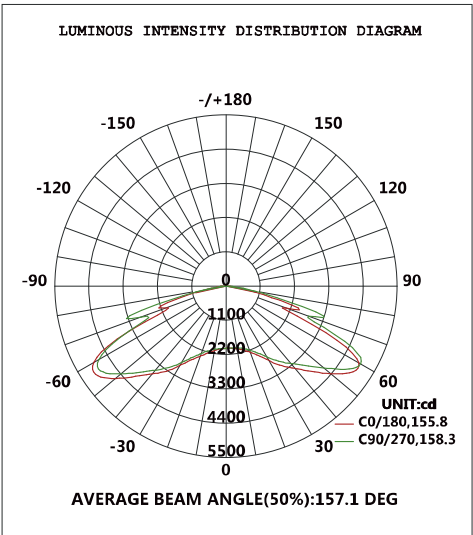




TYPE III (240W)

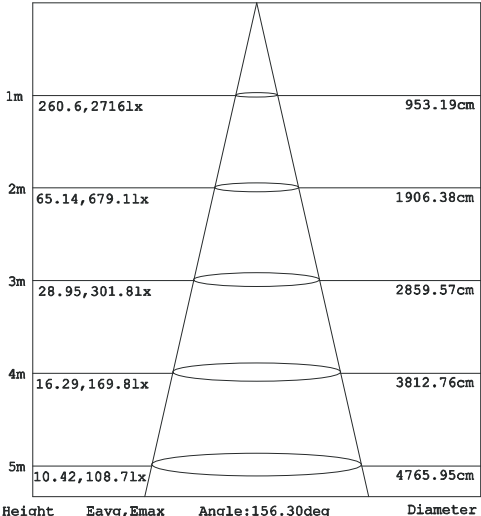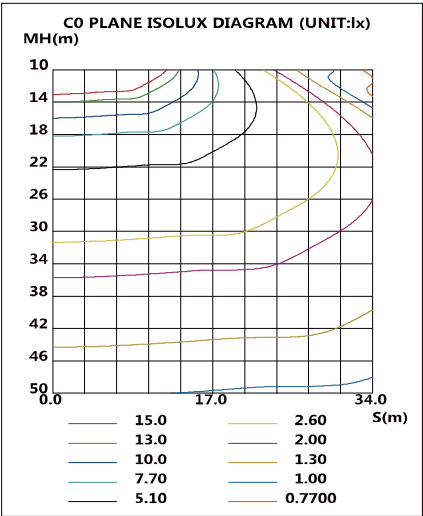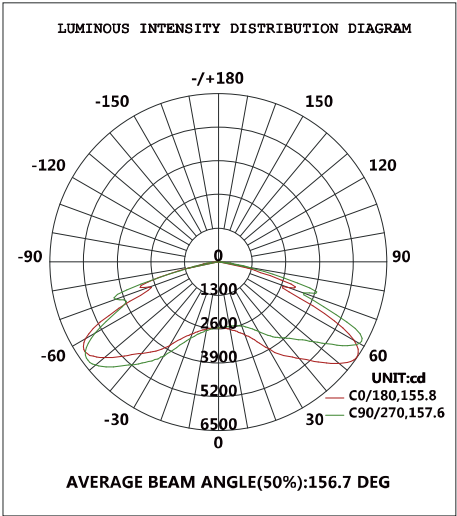

TYPE III (320W)

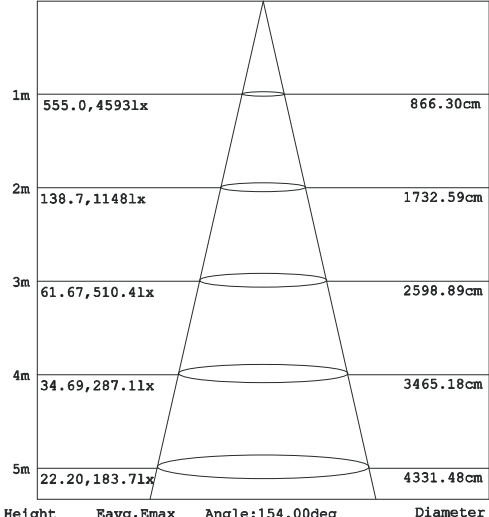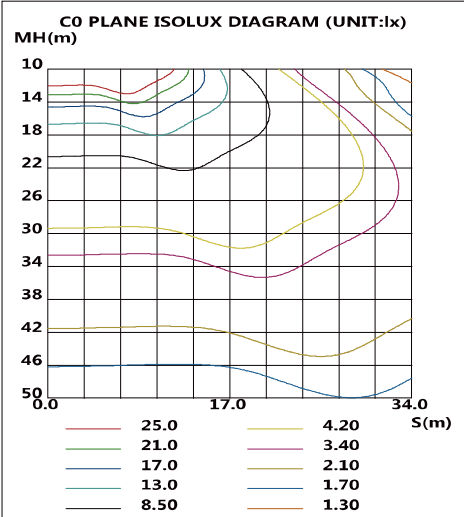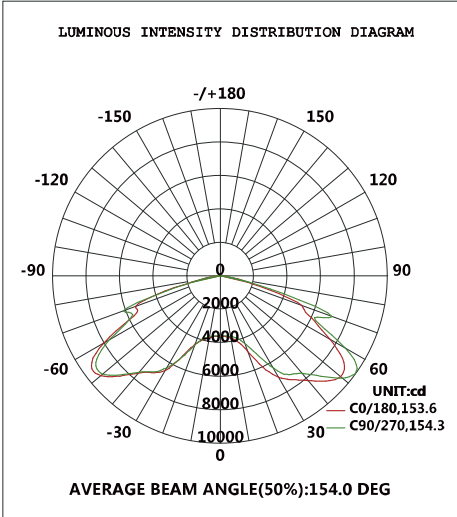

TYPE III (400W)

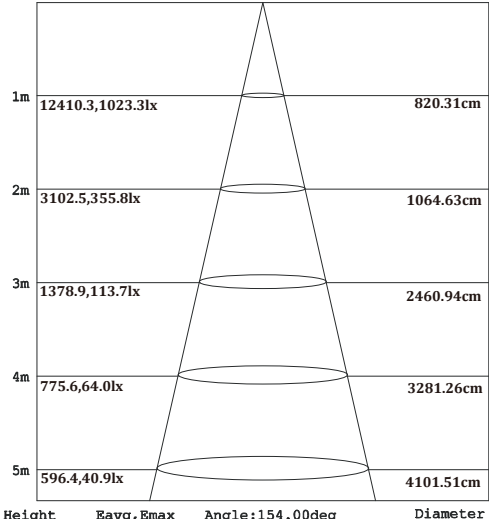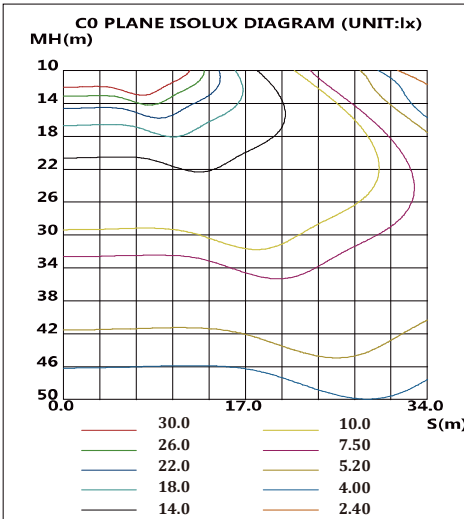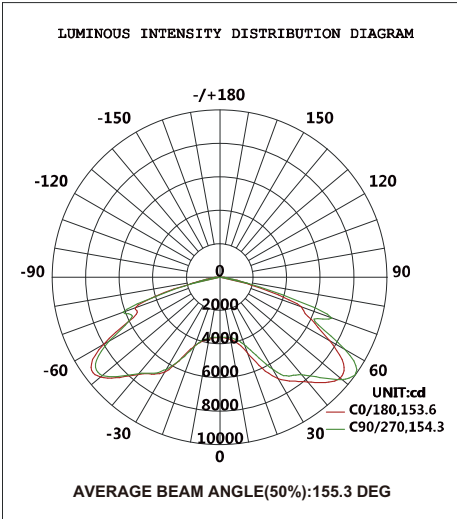

Installation Instruction

***Warning:** Do cut off electrical source in order to avoid electrical shock and endanger life-safety before installation.

***Install height from floor high than 1.2m.**

Step 1:

Start installation of the street light
turn the street light to the back side

Step 2:

Connect the cables

Connect the L,N,GND cables on the lamp to the corresponding L,N,GND cables on the lamp pole.


Step 3:

Fixation of the LED Street lights


Install the street light to the lamp pole, adjust the LED street light to be of horizontal level.

1. Slip Fitter

Pole or Cobra Head

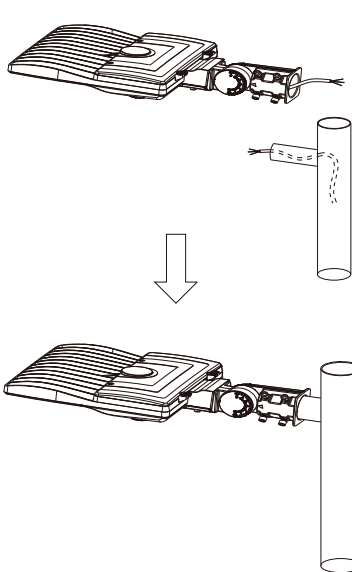


Round Pole

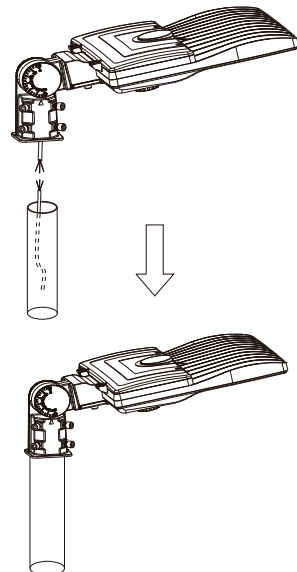


2. Arm

Round Pole

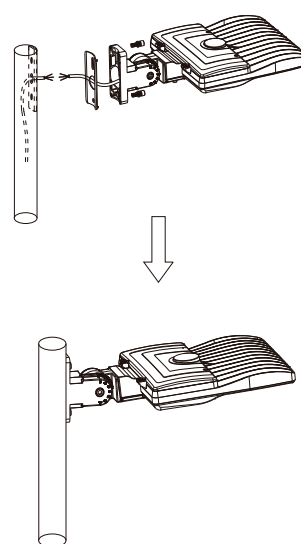

Square Pole

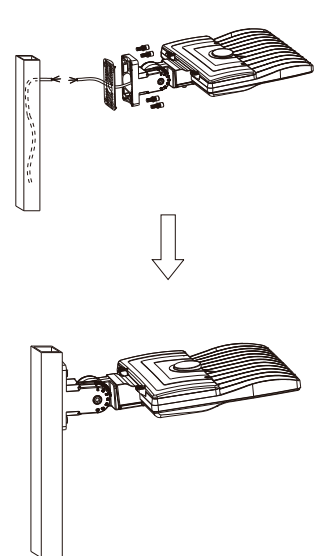

Packaging

No.	Model	Power	N.W.	Inner Box	G.W	Qty/ctn	Outer Carton
1	NG-NSB-100W	100W	6.2Kg	—	7.0Kg	1	26.57"x15.94"x6.49" (675x405x165mm)
2	NG-NSB-150W	150W	6.2Kg	—	7.0Kg	1	26.57"x15.94"x6.49" (675x405x165mm)
3	NG-NSB-200W	200W	6.2Kg	—	7.0Kg	1	26.57"x15.94"x6.49" (675x405x165mm)
4	NG-NSB-240W	240W	9.1Kg	—	10.2Kg	1	33.27"x15.94"x6.49" (845x405x165mm)
5	NG-NSB-320W	320W	9.1Kg	—	10.2Kg	1	33.27"x15.94"x6.49" (845x405x165mm)
6	NG-NSB-400W	400W	9.1Kg	—	10.2Kg	1	33.27"x15.94"x6.49" (845x405x165mm)