




LED Retrofit kit

30W-150W

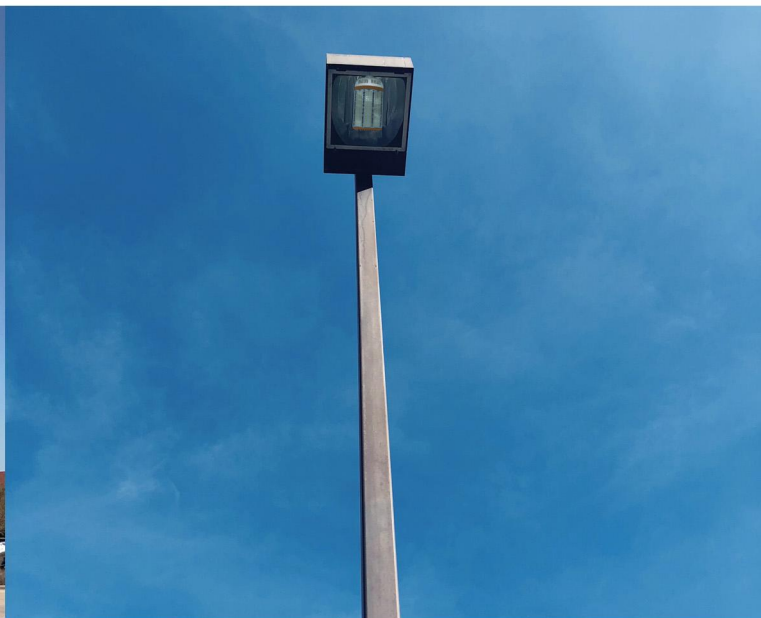

Applications

Directinoal lamps for industrial and commercial fixture applications:
For use in wall pack, canopy, shoe box, or cobra head fixtures.



50,000 hours
Lifespan

Brightness solution for professional lighting

80% Energy saving over HID lamp

LED Retrofit kit

30W/40W/60W/80W/100W/120W/150W

Features

- Pure aluminum through hole and air convection design to speed up heat dissipation .
- Coating surface treatment enhances heat dissipation.
- 340 degree wide-angle lamp holder.
- 150lm/W High photosynthetic efficiency
- Emits no UV light / contains no mercury(Hg).
- Widely replace HID .
- Dust and fire-proof, IP54.




Beam angle





Light down



No fan inside
(30-100W)

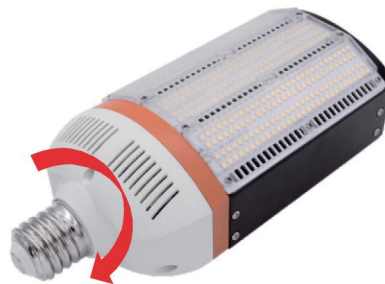

Base 340°
Rotatable

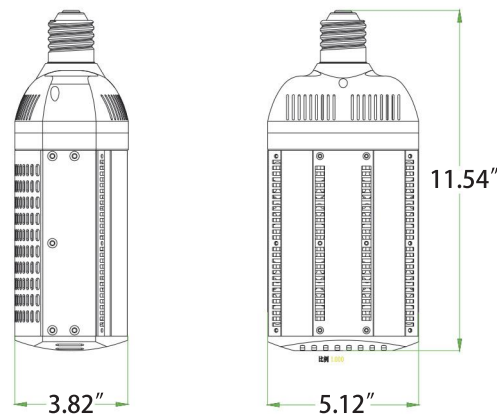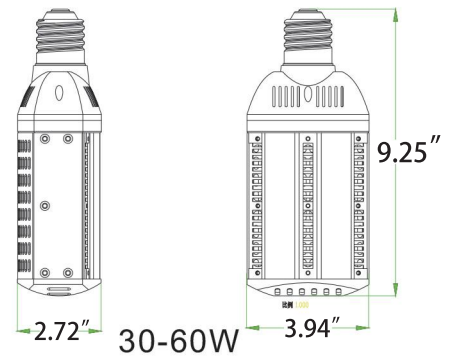

Parameter

Model	Power	Lumens (LM)	Voltage	Luminous Eff.	CCT(K)	Dim. (E39)	CRI	SMD	Weight	IP Rate
NS-ARK30W-01C	30W	4500LM ±200LM	AC100-277V	150lm/W	2500-7000K	235x100x69mm 9.25x3.94x2.72in	>80	2835	700g	IP54
NS-ARK40W-01C	40W	6000LM ±200LM	AC100-277V	150lm/W	2500-7000K	235x100x69mm 9.25x3.94x2.72in	>80	2835	700g	IP54
NS-ARK60W-01C	60W	8600LM ±200LM	AC100-277V	150lm/W	2500-7000K	235x100x69mm 9.25x3.94x2.72in	>80	2835	700g	IP54
NS-ARK80W-01C	80W	11600LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP54
NS-ARK100W-01C	100W	15000LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP54
NS-ARK120W-01C	120W	18000LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP54
NS-ARK150W-01C	150W	22000LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP54



CFL





(HPS/HID/MH)

30W
40W
60W
80W
100W
120W
150W

=

65W	100W
85W	150W
125W	200W
165W	250W
200W	320W
240W	450W
300W	600W

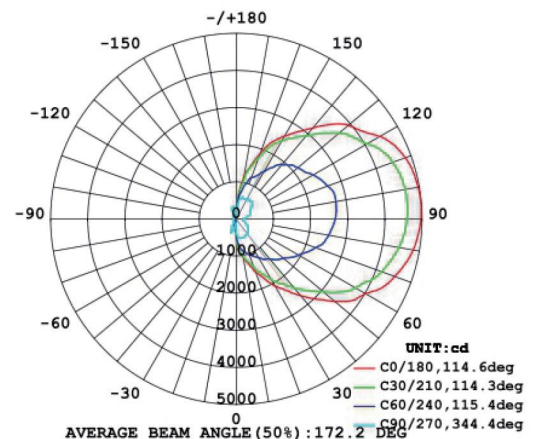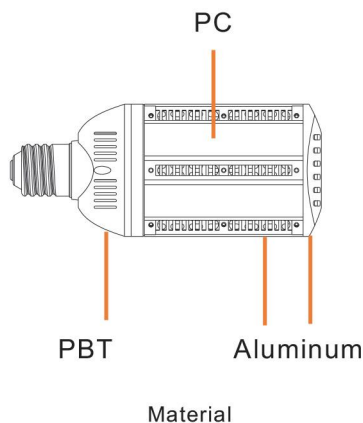

30-60W

Packaging unit (Pieces/Unit)	Dimensions	Gross weight
Small box 2	27*20.5*13cm 10.6"*8"*5.1"	0.7Kg
Outer Carton 24	55.5*42.5*42cm 21.9"*16.7"*16.5"	20Kg


80-150W

Packaging unit (Pieces/Unit)	Dimensions	Gross weight
Small box 1	33.5*12.5*17cm 13.2"*4.9"*6.7"	1.6Kg
Outer Carton 12	51.5*35*54cm 20.3"*13.8"*21.2"	21Kg

Installation

Note: Please remove or pass by original ballast, capacitor or starter, when replace the HID/HPS/MH.

Replace HPS/MH

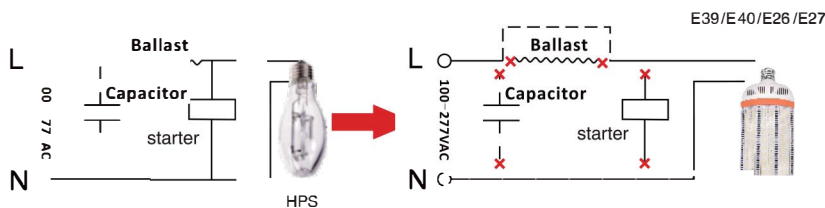

Package

